


Conducta EURO-Kran E 3010/

ZUL-TIV.
SUVA 1409
ZUTK/TÜV 5904

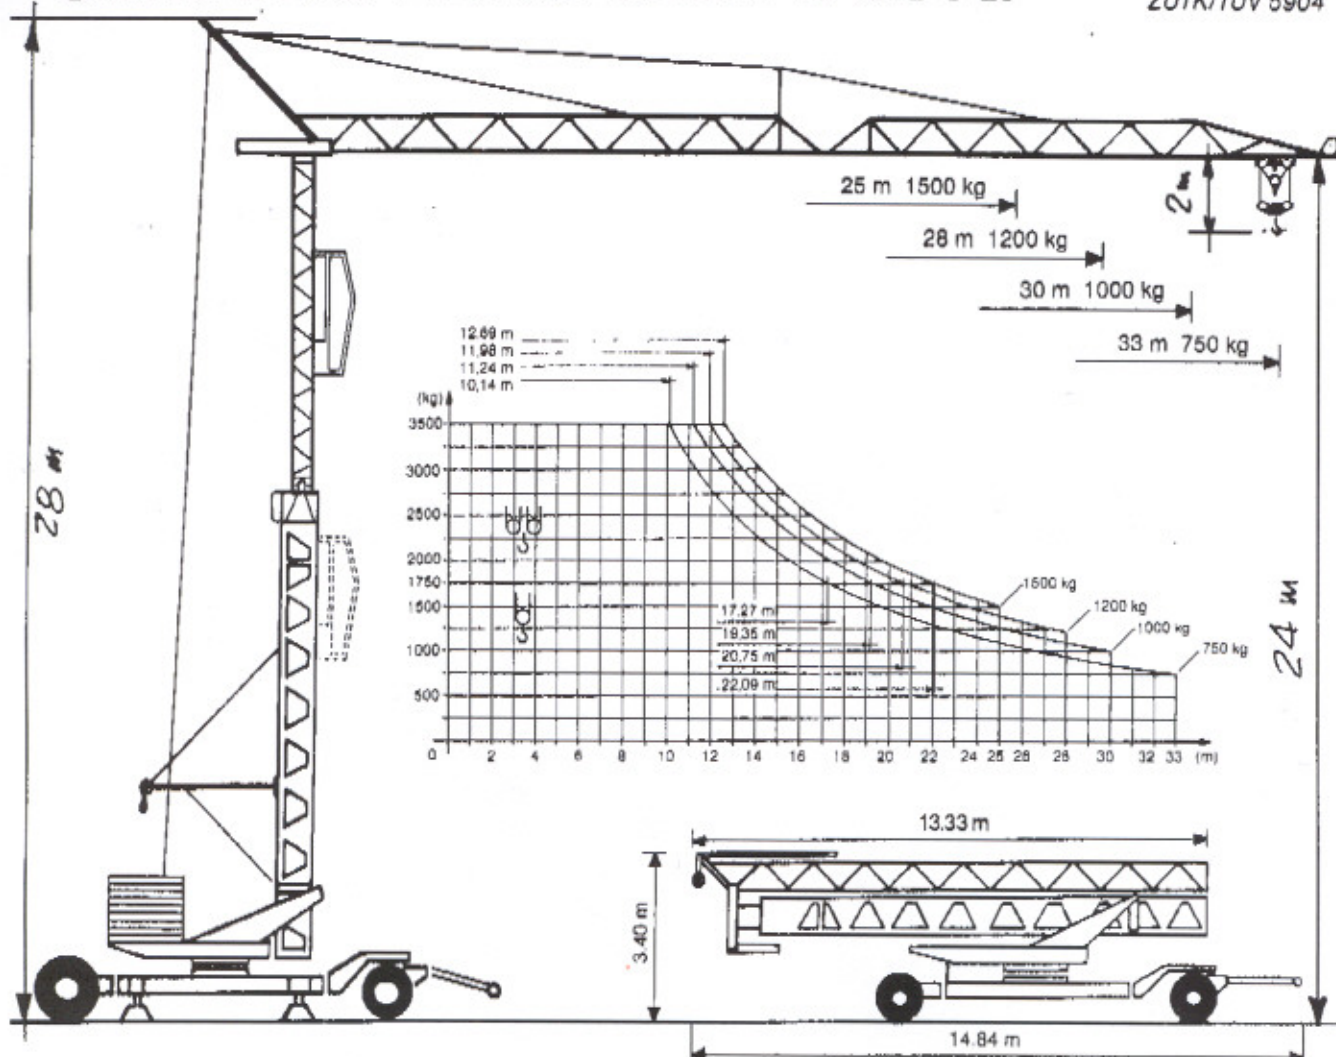

Tragkraft Ausladung	kg	3500	1750	1500	1200	1000	750	Hakenhöhe hauteur s/crochet altezza gancio height of hook	18/23 m
25 m	m	12.69	22.09	25.00				Spurweite écartement de voie scartamento wheel gauge (track)	4.0 m
28 m	m	11.98	20.75		28.00			Radstand empattement carreggiata wheel base	4.0 m
30 m	m	11.24	19.35			30.00			
33 m	m	10.14	17.27				33.00		
			40 m/min v = 20 m/min 3 m/min	1500 kg 1750 kg 1750 kg				Drehradius rayon de giration arrière raggio rotazione rotating radius	2.52-3.05 m
			20 m/min v = 10 m/min 1.5 m/min	3000 kg 3500 kg 3500 kg				Konstruktionsgewicht poids de la grue peso della gru structural weight	12.4 t
								Gegenballast contre poids zavorra contrappeso counterweight	22.50-18.00 t
			v = 20/40 m/min					Eckdruck/Raddruck pression d'angle/charge par roue pressione su uno stabilizzatore corner pressure/wheel pressure	22.70-21.00 t
			n = 0.2/0.6/0.9 U/min stufenlose, progressive Steuerung					Gesamt-Motorenleistung puissance totale des moteurs forza motrice totale total motor output	18 kW
			v = 25 m/min					Kabelquerschnitt section du cable sezione del cavo sottogomma cable section	4 x 10 □

Conducta

Fabrik für Baumaschinen
und Baugeräte

8409 Winterthur
Tel. 052/89 88 88
Fax 052/28 27 37

4616 Kappel/SG
Tel. 062/46 42 20
Fax 062/46 40 76

7302 Landquart
Tel. 081/51 53 33

3053 Münchenbuchsee
Tel. 031/869 39 39
Fax 031/869 39 13